


INSTALL IT. TRUST IT.

AF/ArmaFlex Evo

Discover the new generation in elastomeric insulation. AF/ArmaFlex Evo. The safest AF/ArmaFlex ever.

// Fire Safety – B/B(L)-s2,d0
// Antimicrobial Protection – Microban
// System reliability – One-Stop Solution
// Enviromental Product Declaration (EPD)
// Dust and fiber free
// Available in self-seal tube for quicker install

www.armacell.com

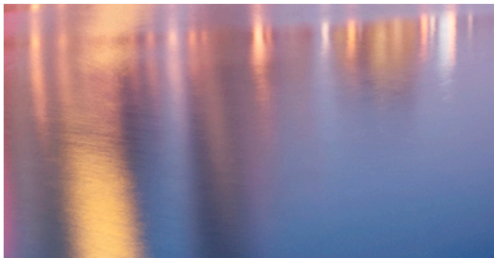





armacell®
ArmaFlex®

INSTALL IT. TRUST IT.

AF/ArmaFlex® Evo

THE SAFEST AF/ARMAFLEX EVER.

History meeting the future through generations. That's what AF/ArmaFlex stands for. For more than 40 years. We strive for perfection so you can benefit from the best ArmaFlex experience. Now it's time to discover the new generation in elastomeric insulation.

Today, in its 8th product generation, we present a new AF/ArmaFlex technology that combines excellent condensation control and energy efficiency with advanced fire safety. The new B/B_L-s2,d0 product provides highest insulation reliability and contributes to the overall safety in buildings.







// Fire safety
At Armacell, safety comes first and maximum reliability is crucial. AF/ArmaFlex Evo increases the fire safety in buildings. By mitigating the fire and smoke risk, it improves visibility and respiration, thus extending the time for evacuating a building safely in the event of a fire.

// Antimicrobial protection
AF/ArmaFlex Evo is equipped with Microban®. These antimicrobial additives provide 'proactive' protection against harmful bacteria, mould and mildew. Armacell is the only manufacturer of flexible technical insulation materials to offer built-in antimicrobial protection.

// Nominal wall thicknesses
Our signature product AF/ArmaFlex Evo is now also available with nominal wall thicknesses. This allows you to quickly identify which insulation thickness is required for a specific application. Our new product dimensions provide you with a wide range of inner tube diameters for a perfect fit on the various pipe dimensions providing maximum reliability to prevent condensation and energy losses.



B/B$_L$-s2,d0

Experience
AF/ArmaFlex Evo

The evolution of an innovation

When tradition meets the future, new products and technologies evolve. AF/ArmaFlex is our heritage product. The highly flexible insulation material with an in-built vapour barrier revolutionised the insulation industry. Today, we provide a complete range of solutions based on this innovation.



Armacell has developed
the new ArmaFlex 525 adhesive
to be used with AF/ArmaFlex Evo.



// System reliability

AF/ArmaFlex Evo is more than a black tube or sheet. Armacell provides solutions where individual components fit flawlessly together and are tested as a system. Our ArmaFlex Protect passive fire protection solution, flexible cladded Arma-Chek® 2-in-1 products and ArmaFlex adhesives complement and strengthen the system to guarantee long-term functionality.

Udo Dohlen
Owner and managing director of Dohlen Isoliertechnik, Stolberg (Germany)
"AF/ArmaFlex isn't just any black tube or sheet. When we insulate our customers' mechanical equipment we make sure to use the best product in the market: AF/ArmaFlex. An investment that pays off. For us and for our customers. Now we can help to make people's homes even safer. AF/ArmaFlex Evo releases 50 percent less smoke in case of fire."

TECHNICAL DATA - AF/ARMAFLEX EVO

Brief description	Flexible elastomeric foam with improved fire-retardant properties, low smoke generation, closed-cell insulation material structure and built-in Microban antimicrobial protection. For use in HVAC, refrigeration and process equipment application.
Material type	Elastomeric foam based on synthetic rubber. Factory-made flexible elastomeric foam (FEF), according to EN 14304.
Additional material information	Self-adhesive coating: pressure-sensitive adhesive coating on modified acrylate basis with mesh structure, covered with polyethylene foil. Traces of silicon can be found on the protection paper/foil used to protect self-adhesive closures.
Product colour range	Black
Special features	This product is infused with Microban antimicrobial protection to provide additional assurance against mould and mildew growth in the insulation.
Applications	Insulation/protection for pipes, air ducts, vessels (including elbows, fittings, flanges, etc.) of air-conditioning/refrigeration and process equipment to prevent condensation and save energy.
Installation	Please refer to the ArmaFlex application manual for advice.
Declaration of performance	Declaration of Performance in accordance with Article 7(3) of Regulation (EU) No 305/2011 is available at www.armacell.com/DoP.

Property	Value / Assessment			Standard / Test method
Temperature range				
Service temperature	Min. °C[1]	Max. °C[2]		EN 14706, EN 14707, EN 14304
	-50	110		
	Remarks	+85 °C if sheet or tape is glued to the object with its whole surface +85 °C for tapes		
Thermal conductivity				
Declared thermal conductivity	θm	0 °C	40°C	EN ISO 13787, EN ISO 8497
	λd ≤ [W/(m·K)]	0,033	0,038	
	Range	Tubes (6 - 25 mm)		
	Formula	λd = [33 + 0,1· ϑm + 0,0008 · ϑm²]/1000		
Declared thermal conductivity	θm	0 °C	40°C	EN ISO 13787, EN 12667, EN ISO 8497
	λd ≤ [W/(m·K)]	0,036	0,041	
	Range	Tubes (>25 mm) as well as sheets and tapes (3 - 32mm)		
	Formula	λd = [36 + 0,1· ϑm + 0,0008 · ϑm²]/1000		
Declared thermal conductivity	θm	0°C	40°C	EN ISO 13787, EN 12667
	λd ≤ [W/(m·K)]	0,037	0,042	
	Range	Sheets (> 32 mm - 50 mm)		
	Formula	λd = [37 + 0,1· ϑm + 0,0008 · ϑm²]/1000		
Fire Performance and Approvals				
Reaction to fire	Tubes: B(L)-s2, d0 Sheets, Tapes: B-s2,d0 Tubes with ArmaFix AF: B(L)-s2,d0 Class 0			EN 13823, EN 13501-1, EN ISO 11925-2, BS 476 Part 6
Surface flammability[3]	low-flammable - 2010 FTP-Code (MED 96/98/EC, Module D)			IMO 2010 FTP Code, Part 5
FM approved	4924 - Pipe and duct insulation			UBC26-3
Passive fire protection				
Fire resistance of elements of construction	EI 30 - EI 90			EN 13501-2, EN 1366-3

Property	Value / Assessment	Standard / Test method
UL standards		
UL 94 5VA[4]	Pass (tubes and sheets ≥ 3.0 mm)	UL 94, IEC 60695-11-10, UL 746B, UL 746 A
Fire performance		
Practical fire behaviour	Self-extinguishing, does not drip, does not spread flames, low smoke development	
Resistance to water vapour		
Water vapour diffusion resistance factor	Tubes (6 - 25 mm): μ ≥ 10.000 Tubes (>25mm); Sheets (3 - 50mm) and Tape: μ ≥ 7.000	EN 12086, EN 13469
Physical attributes		
Dimensions and tolerances	in accordance with EN 14304, table 1	EN 822, EN 823, EN 13467
Weather and UV resistance		
UV resistance[5]	Protection against UV-radiation is necessary (see Technical Bulletin no. 142).	
Health and environment		
Antimicrobial behaviour	In-built Microban active antimicrobial protection: No fungal growth observed	EN ISO 846, VDI 6022
Environmental Product Declaration (EPD)	Type III Environmental Product Declaration (EPD): Declaration number "EPD-ARM-20220038-IBB1-EN", Institut Bauen und Umwelt e.V. (IBU)	ISO 14025, EN 15804+A2
Other technical features		
Adhesion and sealing	ArmaFlex 525 is the certified adhesive for this product. However, ArmaFlex 520 adhesive can be used for tubes.	
Shelf life	Self-adhesive tapes, self-adhesive sheets, self-adhesive tubes: 1 year	
Storage	Can be stored in dry, clean rooms at normal relative humidity (50% to 70%) and ambient temperature (0 °C – 35 °C).	

[1] For use in temperatures beyond the maximum and minimum service temperature range indicated in the technical data table, please contact our Customer Service Centre.

[2] +85 °C, for products with a self-adhesive layer.

[3] According to IMO 2010 FTP Code annex 2, clause 2.2 a fire technical test for smoke density and toxicity is not necessary.

[4] Only for products without self-adhesive-layer.

[5] If ArmaFlex is used outdoors or in applications under UV radiation, it should be protected with a covering such as ArmaClad Arma-Chek within 3 days of installation.

Tube – standard. Black. 2m Length

6 mm			9 mm			13 mm			19 mm		
Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
6	AF-CO-06X006	496 m	6	AF-CO-09X006	352 m	6	AF-CO-13X006	200 m	6	AF-CO-19X006	100 m
10	AF-CO-06X010	380 m	10	AF-CO-09X010	266 m	10	AF-CO-13X010	172 m	10	AF-CO-19X010	92 m
12	AF-CO-06X012	330 m	12	AF-CO-09X012	234 m	12	AF-CO-13X012	142 m	12	AF-CO-19X012	84 m
15	AF-CO-06X015	280 m	15	AF-CO-09X015	200 m	15	AF-CO-13X015	122 m	15	AF-CO-19X015	72 m
-	-	-	18	AF-CO-09X018	166 m	18	AF-CO-13X018	104 m	18	AF-CO-19X018	60 m
-	-	-	20	AF-CO-09X020	140 m	20	AF-CO-13X020	104 m	20	AF-CO-19X020	58 m
-	-	-	22	AF-CO-09X022	140 m	22	AF-CO-13X022	100 m	22	AF-CO-19X022	56 m
-	-	-	25	AF-CO-09X025	108 m	25	AF-CO-13X025	88 m	25	AF-CO-19X025	50 m
-	-	-	28	AF-CO-09X028	98 m	28	AF-CO-13X028	82 m	28	AF-CO-19X028	48 m
-	-	-	32	AF-CO-09X032	80 m	32	AF-CO-13X032	64 m	32	AF-CO-19X032	36 m
-	-	-	35	AF-CO-09X035	76 m	35	AF-CO-13X035	60 m	35	AF-CO-19X035	36 m
-	-	-	42	AF-CO-09X042	64 m	42	AF-CO-13X042	50 m	42	AF-CO-19X042	32 m
-	-	-	48	AF-CO-09X048	54 m	48	AF-CO-13X048	42 m	48	AF-CO-19X048	28 m
-	-	-	54	AF-CO-09X054	52 m	54	AF-CO-13X054	38 m	54	AF-CO-19X054	24 m
-	-	-	60	AF-CO-09X060	48 m	60	AF-CO-13X060	32 m	60	AF-CO-19X060	24 m
-	-	-	-	-	-	64	AF-CO-13X064	30 m	64	AF-CO-19X064	20 m
-	-	-	-	-	-	67	AF-CO-13X067	34 m	67	AF-CO-19X067	20 m
-	-	-	-	-	-	76	AF-CO-13X076	28 m	76	AF-CO-19X076	18 m
-	-	-	-	-	-	80	AF-CO-13X080	20 m	80	AF-CO-19X080	16 m
-	-	-	-	-	-	89	AF-CO-13X089	20 m	89	AF-CO-19X089	16 m
-	-	-	-	-	-	93	AF-CO-13X093	20 m	93	AF-CO-19X093	16 m
-	-	-	-	-	-	108	AF-CO-13X108	20 m	108	AF-CO-19X108	16 m
-	-	-	-	-	-	114	AF-CO-13X114	20 m	114	AF-CO-19X114	14 m
-	-	-	-	-	-	-	-	-	125	AF-CO-19X125	10 m
-	-	-	-	-	-	-	-	-	140	AF-CO-19X140	10 m
-	-	-	-	-	-	-	-	-	160	AF-CO-19X160	10 m
-	-	-	-	-	-	-	-	-	168	AF-CO-19X168	8 m

Tube – standard. Black. 2m Length

6 mm			9 mm			13 mm			19 mm		
Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
Other information											
Thickness tolerance			≤ 8 mm: ±1,0 mm 9 -18 mm: ±1,5 mm 19 - 31 mm: ±2,5 mm > 31 mm: ±3,0 mm								
Length tolerance			±1,5 %								

Tube – standard. Black. 2m Length

25 mm			32 mm			36 mm			40 mm		
Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
10	AF-CO-25X010	60 m	10	AF-CO-32X010	32 m	114	AF-CO-36X114	4 m	18	AF-CO-40X018	16 m
12	AF-CO-25X012	54 m	12	AF-CO-32X012	32 m	125	AF-CO-36X125	4 m	22	AF-CO-40X022	16 m
15	AF-CO-25X015	48 m	15	AF-CO-32X015	32 m	140	AF-CO-36X140	4 m	25	AF-CO-40X025	16 m
18	AF-CO-25X018	40 m	18	AF-CO-32X018	32 m	160	AF-CO-36X160	4 m	28	AF-CO-40X028	16 m
20	AF-CO-25X020	38 m	22	AF-CO-32X022	24 m	168	AF-CO-36X168	4 m	35	AF-CO-40X035	16 m
22	AF-CO-25X022	40 m	25	AF-CO-32X025	24 m	-	-	-	42	AF-CO-40X042	12 m
25	AF-CO-25X025	36 m	28	AF-CO-32X028	24 m	-	-	-	48	AF-CO-40X048	12 m
28	AF-CO-25X028	36 m	32	AF-CO-32X032	18 m	-	-	-	54	AF-CO-40X054	10 m
32	AF-CO-25X032	28 m	35	AF-CO-32X035	18 m	-	-	-	60	AF-CO-40X060	10 m
35	AF-CO-25X035	24 m	42	AF-CO-32X042	18 m	-	-	-	64	AF-CO-40X064	10 m
42	AF-CO-25X042	24 m	48	AF-CO-32X048	18 m	-	-	-	76	AF-CO-40X076	8 m
48	AF-CO-25X048	20 m	54	AF-CO-32X054	12 m	-	-	-	89	AF-CO-40X089	6 m
54	AF-CO-25X054	18 m	60	AF-CO-32X060	10 m	-	-	-	108	AF-CO-40X108	4 m
60	AF-CO-25X060	18 m	64	AF-CO-32X064	10 m	-	-	-	114	AF-CO-40X114	4 m
64	AF-CO-25X064	16 m	67	AF-CO-32X067	12 m	-	-	-	125	AF-CO-40X125	4 m
67	AF-CO-25X067	16 m	76	AF-CO-32X076	10 m	-	-	-	140	AF-CO-40X140	4 m
76	AF-CO-25X076	12 m	89	AF-CO-32X089	10 m	-	-	-	160	AF-CO-40X160	4 m
80	AF-CO-25X080	12 m	108	AF-CO-32X108	6 m	-	-	-	168	AF-CO-40X168	4 m
89	AF-CO-25X089	12 m	114	AF-CO-32X114	8 m	-	-	-	-	-	-
93	AF-CO-25X093	12 m	125	AF-CO-32X125	6 m	-	-	-	-	-	-
108	AF-CO-25X108	8 m	140	AF-CO-32X140	6 m	-	-	-	-	-	-

Tube – standard. Black. 2m Length

25 mm			32 mm			36 mm			40 mm		
Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
114	AF-CO-25X114	10 m	168	AF-CO-32X168	4 m	-	-	-	-	-	-
125	AF-CO-25X125	8 m	-	-	-	-	-	-	-	-	-
140	AF-CO-25X140	4 m	-	-	-	-	-	-	-	-	-
168	AF-CO-25X168	4 m	-	-	-	-	-	-	-	-	-

Other information

Thickness tolerance	⩽ 8 mm: ±1,0 mm 9 -18 mm: ±1,5 mm 19 - 31 mm: ±2,5 mm > 31 mm: ±3,0 mm
Length tolerance	±1,5 %

Tube – standard. Black. 2m Length

45 mm

Pipe Ø [mm]	Item	Content [metric]
35	AF-CO-45X035	10 m
42	AF-CO-45X042	10 m
48	AF-CO-45X048	10 m
54	AF-CO-45X054	8 m
60	AF-CO-45X060	8 m
64	AF-CO-45X064	8 m
76	AF-CO-45X076	6 m
89	AF-CO-45X089	6 m
108	AF-CO-45X108	4 m
110	AF-CO-45X110	4 m
114	AF-CO-45X114	4 m
125	AF-CO-45X125	4 m
140	AF-CO-45X140	4 m
168	AF-CO-45X168	4 m

Other information

Thickness tolerance	⩽ 8 mm: ±1,0 mm 9 -18 mm: ±1,5 mm 19 - 31 mm: ±2,5 mm > 31 mm: ±3,0 mm
Length tolerance	±1,5 %

Tube – self-seal. Black. 2m Length

9 mm			13 mm			19 mm			25 mm		
Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
15	AF-CO-09X015-A	200 m	15	AF-CO-13X015-A	122 m	15	AF-CO-19X015-A	72 m	15	AF-CO-25X015-A	48 m
20	AF-CO-09X020-A	140 m	20	AF-CO-13X020-A	104 m	20	AF-CO-19X020-A	58 m	20	AF-CO-25X020-A	38 m

Tube – self-seal. Black. 2m Length

9 mm			13 mm			19 mm			25 mm		
Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
22	AF-CO-09X022-A	140 m	22	AF-CO-13X022-A	100 m	22	AF-CO-19X022-A	56 m	22	AF-CO-25X022-A	40 m
28	AF-CO-09X028-A	98 m	28	AF-CO-13X028-A	82 m	28	AF-CO-19X028-A	48 m	28	AF-CO-25X028-A	36 m
35	AF-CO-09X035-A	76 m	35	AF-CO-13X035-A	60 m	35	AF-CO-19X035-A	36 m	35	AF-CO-25X035-A	24 m
42	AF-CO-09X042-A	64 m	42	AF-CO-13X042-A	50 m	42	AF-CO-19X042-A	32 m	42	AF-CO-25X042-A	24 m
48	AF-CO-09X048-A	54 m	48	AF-CO-13X048-A	42 m	48	AF-CO-19X048-A	28 m	48	AF-CO-25X048-A	20 m
54	AF-CO-09X054-A	52 m	54	AF-CO-13X054-A	38 m	54	AF-CO-19X054-A	24 m	54	AF-CO-25X054-A	18 m
60	AF-CO-09X060-A	48 m	60	AF-CO-13X060-A	32 m	60	AF-CO-19X060-A	24 m	60	AF-CO-25X060-A	18 m
-	-	-	67	AF-CO-13X067-A	34 m	67	AF-CO-19X067-A	20 m	67	AF-CO-25X067-A	16 m
-	-	-	76	AF-CO-13X076-A	28 m	76	AF-CO-19X076-A	18 m	76	AF-CO-25X076-A	12 m
-	-	-	89	AF-CO-13X089-A	20 m	89	AF-CO-19X089-A	16 m	89	AF-CO-25X089-A	12 m

Other information

Thickness tolerance	≤ 8 mm: ±1,0 mm 9 -18 mm: ±1,5 mm 19 - 31 mm: ±2,5 mm > 31 mm: ±3,0 mm
Length tolerance	±1,5 %

Coil. 15m Length

Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
6	AF-CO-09X006/E-15	180 m	6	AF-CO-13X006/E-15	135 m
10	AF-CO-09X010/E-15	150 m	10	AF-CO-13X010/E-15	105 m
12	AF-CO-09X012/E-15	135 m	12	AF-CO-13X012/E-15	90 m
15	AF-CO-09X015/E-15	135 m	15	AF-CO-13X015/E-15	90 m
20	AF-CO-09X020/E-15	105 m	20	AF-CO-13X020/E-15	90 m
22	AF-CO-09X022/E-15	90 m	22	AF-CO-13X022/E-15	75 m
28	AF-CO-09X028/E-15	75 m	28	AF-CO-13X028/E-15	60 m

Coil. AC Coils

Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]	Pipe Ø [mm]	Item	Content [metric]
10	AF-CO-06X010/E	75 m	6	AF-CO-09X006/E	70 m	6	AF-CO-13X006/E	45 m
15	AF-CO-06X015/E	55 m	10	AF-CO-09X010/E	50 m	10	AF-CO-13X010/E	35 m
-	-	-	12	AF-CO-09X012/E	45 m	12	AF-CO-13X012/E	32 m
-	-	-	15	AF-CO-09X015/E	40 m	15	AF-CO-13X015/E	28 m
-	-	-	20	AF-CO-09X020/E	34 m	20	AF-CO-13X020/E	28 m
-	-	-	22	AF-CO-09X022/E	30 m	22	AF-CO-13X022/E	26 m
-	-	-	28	AF-CO-09X028/E	26 m	25	AF-CO-13X025/E	20 m
-	-	-	-	-	-	28	AF-CO-13X028/E	20 m

AF/ArmaFlex Evo . Sheet – standard. Black

Item	Insulation thickness [mm]	Description	Width [mm]	Length [m]	Content [metric]
AF-EVO-10MM	10	10mm thick sheet, 2.0 x 0.5m	500	2	13 m²
AF-EVO-13MM	13	13mm thick sheet, 2.0 x 0.5m	500	2	9 m²
AF-EVO-19MM	19	19mm thick sheet, 2.0 x 0.5m	500	2	7 m²
AF-EVO-25MM	25	25mm thick sheet, 2.0 x 0.5m	500	2	5 m²
AF-EVO-32MM	32	32mm thick sheet, 2.0 x 0.5m	500	2	4 m²
AF-EVO-50MM	50	50mm thick sheet, 2.0 x 0.5m	500	2	3 m²
Other information					
Thickness tolerance		7 -19 mm: ±1.5 mm >19 mm: ±2.0 mm			
Length tolerance		± 1.5 %			
Remarks		One 1m² sheet can be replaced by two pieces of 0.5 m² sheet.			

AF/ArmaFlex Evo . Sheet – self-adhesive. Black

Item	Insulation thickness [mm]	Description	Width [mm]	Length [m]	Content [metric]
AF-EVO-10MM/A	10	10mm thick self-adhesive sheet, 2.0 x 0.5m	500	2	13 m²
AF-EVO-13MM/A	13	13mm thick self-adhesive sheet, 2.0 x 0.5m	500	2	9 m²
AF-EVO-19MM/A	19	19mm thick self-adhesive sheet, 2.0 x 0.5m	500	2	7 m²
AF-EVO-25MM/A	25	25mm thick self-adhesive sheet, 2.0 x 0.5m	500	2	5 m²
AF-EVO-32MM/A	32	32mm thick self-adhesive sheet, 2.0 x 0.5m	500	2	4 m²
AF-EVO-50MM/A	50	50mm thick self-adhesive sheet, 2.0 x 0.5m	500	2	3 m²
Other information					
Thickness tolerance		7 -19 mm: ±1.5 mm >19 mm: ±2.0 mm			
Length tolerance		± 1.5 %			
Remarks		One 1m² sheet can be replaced by two pieces of 0.5 m² sheet.			

AF/ArmaFlex Evo . Roll - standard. Black

Item	Insulation thickness [mm]	Description	Width [mm]	Length [m]	Content [metric]
AF-EVO-03MM/E	3	3mm thick continuous sheet, 1m x 30m	1.000	30	30 m²
AF-EVO-06MM/E	6	6mm thick continuous sheet, 1m x 15m	1.000	15	15 m²
AF-EVO-10MM/E	10	10mm thick continuous sheet, 1m x 10m	1.000	10	10 m²
AF-EVO-13MM/E	13	13mm thick continuous sheet, 1m x 8m	1.000	8	8 m²
AF-EVO-19MM/E	19	19mm thick continuous sheet, 1m x 5m	1.000	5	5 m²
AF-EVO-25MM/E	25	25mm thick continuous sheet, 1m x 4m	1.000	4	4 m²

AF/ArmaFlex Evo . Roll - standard. Black

Item	Insulation thickness [mm]	Description	Width [mm]	Length [m]	Content [metric]
AF-EVO-32MM/E	32	32mm thick continuous sheet, 1m x 3m	1.000	3	3 m²
Other information					
Thickness tolerance		3mm: ±1.5mm 6mm: ±1.0mm 7 - 19mm: ±1.5mm >19mm: ±2.0mm			
Length tolerance		±1.5%			

AF/ArmaFlex Evo . Roll - standard self-adhesive. Black

Item	Insulation thickness [mm]	Description	Width [mm]	Length [m]	Content [metric]
AF-EVO-03MM/EA	3	3mm thick continuous self-adhesive sheet, 1m x 30m	1.000	30	30 m²
AF-EVO-06MM/EA	6	6mm thick continuous self-adhesive sheet, 1m x 15m	1.000	15	15 m²
AF-EVO-10MM/EA	10	10mm thick continuous self-adhesive sheet, 1m x 10m	1.000	10	10 m²
AF-EVO-13MM/EA	13	13mm thick continuous self-adhesive sheet, 1m x 8m	1.000	8	8 m²
AF-EVO-16MM/EA	16	16mm thick continuous self-adhesive sheet, 1m x 7m	1.000	7	7 m²
AF-EVO-19MM/EA	19	19mm thick continuous self-adhesive sheet, 1m x 5m	1.000	5	5 m²
AF-EVO-25MM/EA	25	25mm thick continuous self-adhesive sheet, 1m x 4m	1.000	4	4 m²
AF-EVO-32MM/EA	32	32mm thick continuous self-adhesive sheet, 1m x 3m	1.000	3	3 m²
Other information					
Thickness tolerance		3mm: ±1.5mm 6mm: ±1.0mm 7 - 19mm: ±1.5mm >19mm: ±2.0mm			
Length tolerance		±1.5%			

Adhesives and Cleaners

Item	Description	Content [quantity]
ADH-525/0.25	0,25 litre tins packed in a carton.	40 tin
ADH-525/0,5	0,5 litre tins packed in a carton.	12 tin
ADH-525/1,0	1.0 litre tins packed in a carton.	12 tin
ADH-525/2,5	2.5 litre tins packed in a carton.	8 tin
ADH-RS850/0,5	ArmaFlex RS850 ahesive. Available in 0.5 litre cans.	6 tin
ADH-ECO550/300G	300 g tins of ArmaFlex ECO550 adhesive packed in a carton.	6 piece
ACT-ECO550/0,1	100 ml tins of ArmaFlex ECO550 activator packed in a carton.	6 piece
SF-CLEANER/1,0	Solvent-free cleaner for use with ArmaFlex	6 tin
CLEANER/1,0	Special cleaner for use with ArmaFlex adhesives	4 tin

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our Data Protection Policy.

Trademarks followed by ® or ™ are trademarks of the Armacell Group. © Armacell, 2024. All rights reserved.

ArmaFlex | AF/ArmaFlex Evo (Nominal) | Brochure | 012025 | en-GB

ABOUT ARMACELL

As the inventor of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal and mechanical solutions that create sustainable value for its customers. Armacell's products significantly contribute to global energy efficiency making a difference around the world every day. With more than 3,300 employees and 25 production plants in 19 countries, the company operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for acoustic and lightweight applications, recycled PET products, next-generation aerogel technology and passive fire protection systems.

armacell®
ArmaFlex®

For more information, please visit:
www.armacell.com