
SeaRox MA 720 ALU NEW NAME

Marine Batts 32 RL w. reinf. alu

Comfort Insulation

Product description

SeaRox MA 720 ALU is a soft, lightweight mat made of stone wool.
SeaRox MA 720 ALU is supplied as a highly compressed roll.
The product is as standard supplied with reinforced alu foil.

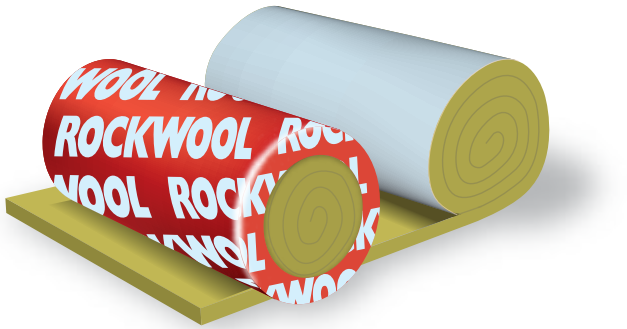

Application

SeaRox MA 720 ALU is used for comfort insulation. The high compression reduces the transport cost significantly.

Product Properties

	Performance			Norm
Thermal conductivity	T (°C)	10	50	EN 12667
	λ (W/mK)	0,036	0,045	
Nominal density	32 kg/m³			EN 1602 / IMO
Compressive strength	-			EN 826
Fire classification	Non-combustible Low Flame-Spread Properties			Acc. IMO FTP code
Water absorption (short term)	< 1 kg/m²			EN 1609 AC
Max. Application Temperature	Wool 250°C Facing 80°C			-
Sound absorption directly mounted	-			ISO 354 (approximated) Evaluated after ISO 11 654
Facings	Reinforced alu foil			IMO A.653(16) (low flame - spread)

Dimensions

SeaRox MA 720 ALU
Thickness (mm): 50, 100 Length (mm): 4000 Width (mm): 1000

Local variations in standard dimensions might occur.

0575/

Rockwool Technical Insulation reserves the right to make necessary product changes at any time. Technical specifications are thus stated subject to change.

ROCKWOOL®
TECHNICAL INSULATION

Rockwool Technical Insulation
DK-2640 Hedehusene
Tel: +45 46 56 16 16
Fax. +45 46 56 16 04
export@rockwool.com
www.rockwool-rti.com
Part of Rockwool International A/S